


AG-500D Series

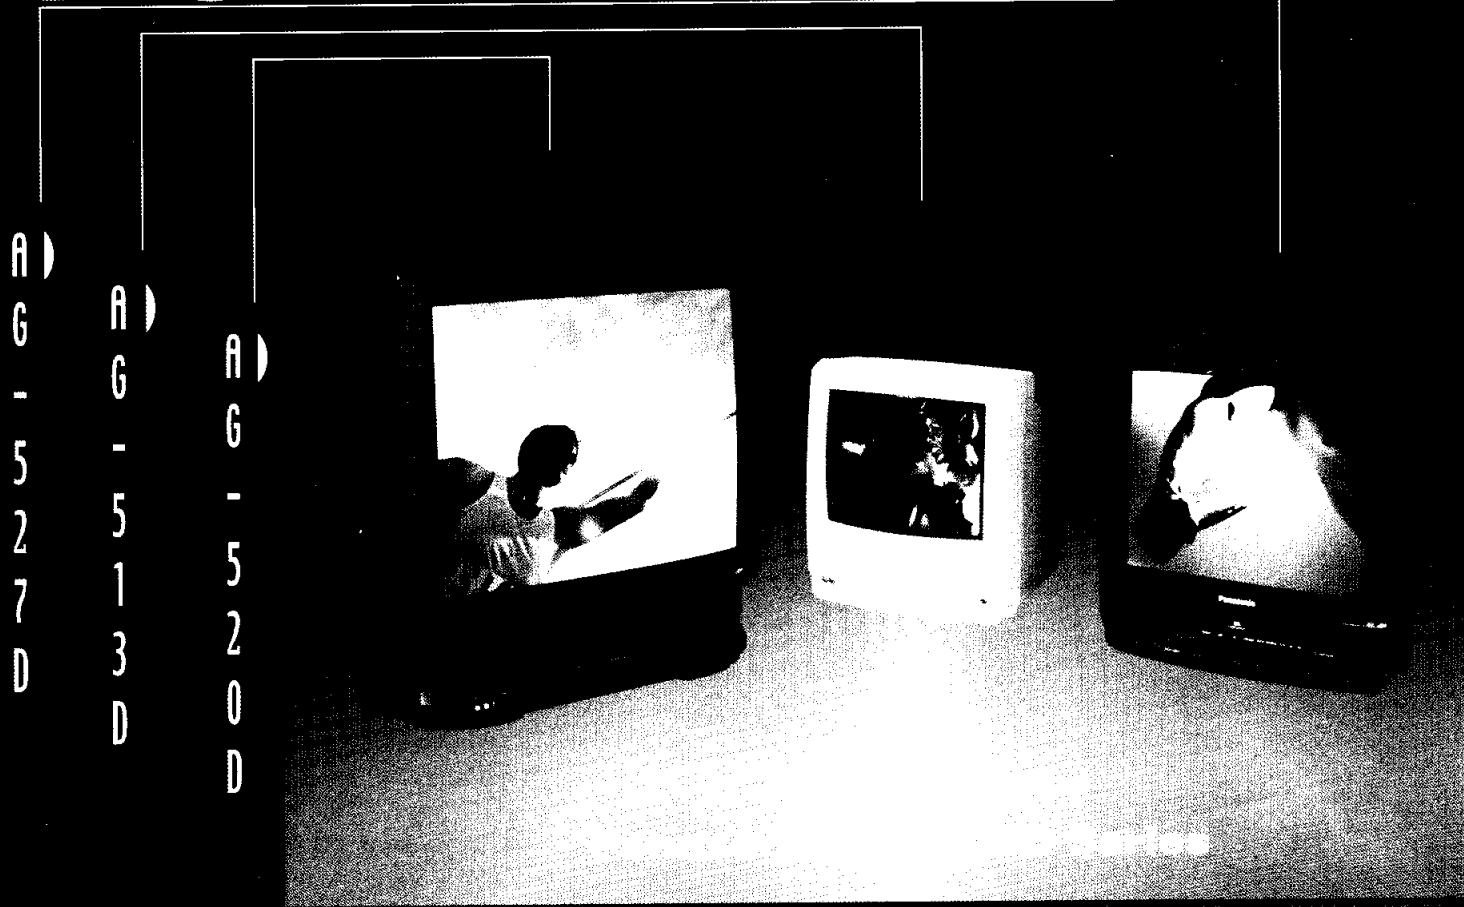

Full-Featured Panasonic TV/VCR Combos ready to perform!

Panasonic's AG-500D Series integrated VCR/monitor receivers perform like superbly conditioned athletes, delivering extraordinary results day in and day out. Combining a Super 4-head VCR with a 181-channel television/monitor, Panasonic AG-500D Series brings together two powerful communication tools - *television and videotape* - to a wide range of professional applications. When space and budget are at a minimum, the 13", 20" and 27" models are highly affordable and offer outstanding professional features not found on consumer models. From point-of-purchase, classroom and kiosk applications to office installations and corporate training, the AG-500D Series is the ideal partner that looks superb in any situation.

Outstanding Benefits of the AG-500D Series Include:

- A/V Input Jacks and Earphone Jack on Front Panel
- 4-Event Timer Record/Timer Playback
- *Professional Warranty*: One Year Parts and Labor
- TV Tuner "Block Out" Function
- Front Panel "Lock Out" Function
- Auto play w/ Repeat Function for Kiosk applications
- Auto Clock Set and Zero Search
- One Minute Skip & On-Screen Display Programming
- ON Timer, Rapid Tune, Real-time Record Time Counter
- 3-prong UL safety plug
- 27-function remote control



Panasonic
Broadcast & Television Systems Company

The AG-500D Series

AG-513D 13"/AG-520D 20" Specifications

Display

Picture Tube: 13" (AG-513D), 20" (AG-520D) measured diagonal, 90° deflection Picture Tube

VCR

Video Recording System: 4 rotary heads helical scanning system
Audio Track: 1 track

Tuner

Broadcast Channels: VHF 2~13, UHF 14~69
CATV Channels: Midband A through I (14~22), Superband J thru W (23~36)
Hyperband AA-EEE (37~64), Lowband A-5~A-1 (95~99)
Special CATV channel 5A (01), Ultraband 65~94, 100~125

General

Power Source: 120V, 60 Hz
Power Consumption: On: AG-513C - approximately 69 watts
AG-520C - approximately 110 watts
Off: Approximately 6 watts
Power Consumption: Off: Approximately 6 watts
Television System: EIA Standard NTSC color
Speaker: 1 piece
Operating Temperature: 41°F - 104°F (5°C - 40°C)
Operating Humidity: 10% - 75%
Weight: AG-513D - 26.4 lbs., AG-520D - 50.7 lbs.
Dimensions: AG-513D - 15- $\frac{3}{8}$ " (W) x 15- $\frac{3}{8}$ " (H) x 16- $\frac{1}{8}$ " (D)
AG-520D - 20- $\frac{3}{8}$ " (W) x 19- $\frac{1}{8}$ " (H) x 19- $\frac{1}{8}$ " (D)



AG-513D



AG-520D

AG-527D Specifications

Display

Picture Tube: 27" measured diagonal 100° deflection Picture Tube

VCR

Video Recording System: 4 rotary heads helical scanning system
Audio Track: 1 track 2 channel (Hi-Fi Audio Sound)

Tuner

Broadcast Channels: VHF 2~13, UHF 14~69
CATV Channels: Midband A through I (14~22), Superband J thru W (23~36)
Hyperband AA-EEE (37~64), Lowband A-5~A-1 (95~99)
Special CATV channel 5A (01), Ultraband 65~94, 100~125

General

Power Source: 120V, 60 Hz
Power Consumption: On: Approximately 157 watts
Power Consumption: Off: Approximately 7 watts
Television System: EIA Standard NTSC color
Speaker: 2 piece
Operating Temperature: 41°F~104°F (5°C~40°C)
Operating Humidity: 10%~75%
Weight: 85.9 lbs.
Dimensions: 27- $\frac{1}{8}$ " (W) x 27- $\frac{1}{8}$ " (H) x 21- $\frac{5}{16}$ " (D)



AG-527D

EXECUTIVE OFFICE EASTERN ZONE

3330 Cahuenga Blvd W., Los Angeles, CA 90068 (323) 436-3500

One Panasonic Way, 4E-7, Secaucus, NJ 07094 (201) 348-7621

Mid-Atlantic/New England Region • One Panasonic Way, 4E-7, Secaucus, NJ 07094 (201) 348-7621

Southeast Region • 1225 Northbrook Parkway, Suite 1-160, Suwanee, GA 30024 (770) 338-6835

Central Region 1707 N. Randall Road, E1-C-1, Elgin, IL 60123 (847) 468-5200

WESTERN ZONE

3330 Cahuenga Blvd W., Los Angeles, CA 90068 (323) 436-3500

Southwest Region • 6226 Abington Way, Houston, TX 77008 (713) 802-2726

Northern California/Northwest Region • 5870 Stoneridge, #3, Pleasanton, CA 95488 (925) 416-5108

GOVT MKTG DEPT.

52 West Gude Drive, Rockville, MD 20850 (301) 738-3840