PRODUCT FEATURES

Panasonic®

WV-BM1700 16" DIAGONAL BLACK-AND-WHITE VIDEO MONITOR





KEY FEATURES

- 850 lines at center
- DC restoration switchable
- Short H. AFC time constant
- Loopthrough BNC connectors for video and sync input and output

- Rack-mountable with optional WV-Q22A rack angle bracket
- Ivory finish


ARCHITECTS' AND ENGINEERS' BID SPECIFICATIONS

The 16" black-and-white video monitor shall be a Panasonic Model WV-BM1700 or equivalent.

The monitor shall feature a 16" screen with horizontal resolution of 850 lines center, DC restoration (switchable), scanning (switchable) 5% over and under, external sychronization (sync selector switch), cable loss compensation (switchable), horizontal AFC (switchable) and video loopthrough. Front controls shall be POWER SWITCH with POWER INDICATOR, SCAN SIZE SWITCH, HORIZONTAL CONTROL, VERTICAL HOLD CONTROL, BRIGHTNESS CONTROL, CONTRAST CONTROL, recessed screw-type controls for HEIGHT ADJUSTMENT, VERTICAL LINEARITY ADJUSTMENT and FOCUS ADJUSTMENT. Unit shall be EIA 19" rack-mountable with optional adaptor WV-Q22A. The power source shall be 120VAC, 60Hz. The monitor shall be UL listed.

Panasonic_® (

Model No.	WV-BM1700
Power Source	120VAC, 60Hz
Power Consumption	45W
Actual Visual Size	16¼" diagonal
CRT Size	17¾" (44cm) diagonal
19" Rack-Mount	Yes*
Video Input	1
External Sync	Yes
Horizontal Resolution	850 lines
(at center)	
Sweep Linearity	5%
(less than) (overscan)	
Sweep Geometry	2%
(less than)	
Scanning	Switchable
Overscanning	5%
Underscanning	5%
DC Restoration	Yes
(switchable)	(Yes)
Ambient Operating	+14°F ~ +122°F
Temperature	(-10°C ~ +50°C)
Ambient Operating	Less than 90%
Humidity	
Dimensions	16¾"H x 16‰"W x 14‰"D
	(411 x 420 x 378mm)

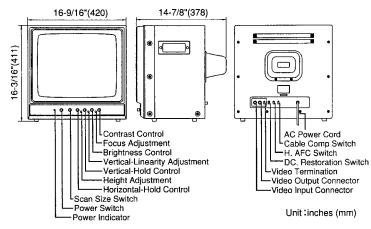

RACK-MOUNT INFORMATION

Rack-Mount Accessory Rack Height (EIA) Units Dimensions WV-Q22A (optional) 10 units 15¹‰"H x 18%"W x 14%"D

*With optional rack angle bracket.

Weights and dimensions are approximate.

Specifications are subject to change without notice.

These products may be subject to export control regulations.