

**SONY**<sup>®</sup>

Broadcast and Professional Monitors

# BVM-D Series

*Multiformat*

NTSC area

# Defining Digital @ Sony



*Sony's legendary line of broadcast monitors now has a new family of additions. The BVM-D series digital monitors are optimized for the DTV world. They support 480I, 480P, 720P and 1080I inputs directly, with no need for a scan converter. They display each input signal at its native frequency and resolution with an extremely high degree of color accuracy. And they incorporate the patented, award-winning Trinitron® CRT system to deliver uncompromising quality and detail.*

---

## Multiformat Signal Support

These monitors accept the wide variety of digital signals necessary to allow you the freedom to produce in whatever format you choose: 480I, 480P, 720P or 1080I.

---

## Sony Technology

To provide the highest possible picture quality, all BVM monitors are equipped with CRTs manufactured by Sony, using SMPTE-C standard phosphors\*. New flat surface 16:9 aspect HR Trinitron CRTs have been developed exclusively for the BVM-D32E1WU and BVM-D24E1WU.

\* P-22 phosphors are used in the BVM-D9H1U/D9H5U.

---

## Functionality

This new BVM monitor series can be used in a variety of applications.

- Master monitors:  
BVM-D32E1WU/  
BVM-D24E1WU/D20F1U
- Picture monitors:  
BVM-D14H1U/D14H5U/  
D9H1U/D9H5U
- Field use:  
BVM-D9H1U/D9H5U



# Line-up

## A Complete line-up of DTV Ready Monitors

*Designed specifically to meet your diverse DTV requirements, while also supporting the interfaces, infrastructures, and archival formats you are using now.*

Only Sony can provide you with the complete line-up — from 32" master monitors to 9" picture and field-use monitors — that you will need as you make your transition to digital. And only Sony provides the technology to enable you to continue using your current monitors next to your new digital monitors in one integrated system.

### Master Monitor

- 32", 24" and 20" monitors\*
- Newly developed flat surface, 16:9 aspect HR Trinitron CRTs for the 32" and 24" master monitors
- Resolution of 1000 TV lines (32" and 24" in 4:3/16:9 modes) and 900/700 TV lines (20" in 4:3/16:9 modes)



BVM-D24E1WU display unit with optional BKM-10R and BKM-34H attached

### Picture Monitor

- 14" and 9" monitors\*
- Display unit (BVM-D14H1U/D9H1U) and stand-alone (BVM-D14H5U/D9H5U) monitors for greater flexibility in system integration
- Resolution of 800/600 TV lines (14" in 4:3/16:9 modes) and 450/340 TV lines (9" in 4:3/16:9 modes)



BVM-D14H5U stand-alone monitor

### Field Use

- 9" monitors\*
- Optional lithium-ion battery packs available for added convenience
- Optional Monitor ENG kit (hood and rear protector) available
- Audio capability, built-in speaker, and simple stand for added versatility in the field (BVM-D9H5U only)



BVM-D9H5U stand-alone monitor with optional VF-508 Monitor ENG kit

\* 32", 24", 20", 14" and 9" refer to the CRT size. For viewable area, measured diagonally, please refer to the specifications.

# Features

## BVM-D Series Monitor Features

### Multiformat Signal Support

All of these monitors accept signals with a frequency range of 15.625 kHz to 45 kHz, and each picture signal is directly scanned


from the original signal using the point scan method to achieve high picture quality.

### Acceptable Formats

System	Horizontal scanning frequency	Total lines per frame	Active lines per frame	Frame rate* (Hz)	Scanning format	Aspect	Standard
575/50I (PAL)	15.625	625	575	25	2:1 Interlace	16:9 / 4:3	ITU 601
480/60I (NTSC)	15.734	525	483	30	2:1 Interlace	16:9 / 4:3	ITU 601
575/50P	31.250	625	575	50	Progressive	16:9 / 4:3	—
480/60P	31.469	525	483	60	Progressive	16:9 / 4:3	SMPTE 293M
1080/24PsF	27.000	1125	1080	24	2:1 Interlace	16:9	—
1080/50I	28.125	1125	1080	25	2:1 Interlace	16:9	SMPTE 274M
1035/60I	33.750	1125	1035	30	2:1 Interlace	16:9	BTA S-001B
1080/60I	33.750	1125	1080	30	2:1 Interlace	16:9	SMPTE 274M / BTA S-001B
720/60P	45.000	750	720	60	Progressive	16:9	SMPTE 296M

\* Each of the frame rates is also compatible with 1/1.001.

### System Integration

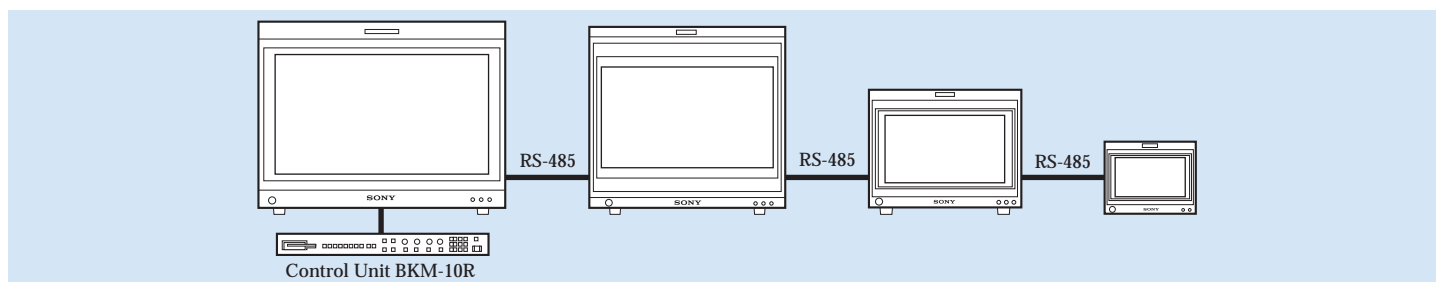

Only the Sony BVM-D series provides you with models ranging from 9" to 32" that can be controlled in one completely integrated, multi-control system. And, your current E, F, and G series BVM monitors and HDM series monitors can also be controlled in the same system.

- Modular design with separate display and control units
- Parallel and RS-485 serial remote control capability
- Up to 32 monitors can be controlled with one control unit
- Optional rack mounting kits

### Superb Picture Reproduction

- HR Trinitron provides high resolution pictures
- SMPTE-C standard phosphors\*
- Sony manufactured CRTs provide excellent color uniformity and performance
- Beam current feedback for stable color temperature

\* P-22 phosphors are used in the BVM-D9H1U/D9H5U.

### Auto Set-up Capabilities

- Built-in auto set-up system for chroma, phase, and white balance
- Precise color temperature adjustment using external color probes: Sony BKM-14L, Graseby SLS 9400, Minolta CA-100, Philips PM 5639, Thoma TF6
- Adjustable color temperature (factory preset to D65)

### Aspect Ratio

The BVM-D32E1WU/D24E1WU, with their 16:9 CRTs, are capable of displaying both 16:9 and 4:3 formats. The other models are all equipped with 4:3 CRTs that are also capable of displaying the 16:9 formats. 16:9 and 4:3 aspect ratio masks are supplied with the 20", 14" and 9" models.



Interchangeable 16:9 and 4:3 aspect ratio masks

# Features

## 32", 24" and 20" Monitor Features

- Flat surface, 16:9 aspect ratio HR Trinitron CRTs developed specifically for the BVM-D32E1WU and BVM-D24E1WU
- Optional BKM-12Y Memory Card for storage and recall of primary set-up data
- Safe area display, 4:3 area marker (line, translucent mat, full black mat)
- Data transfer between monitors using an optional BKM-12Y Memory Card or via an RS-485 link
- ISR (Interactive Status Reporting) for system diagnostics
- Built-in test signal generator for crosshatch, 100% white signal, 20% gray signal, gray scale, and PLUGE



Flat surface, 16:9 aspect ratio HR Trinitron CRT

## On-screen Menus for Adjustment and Operation

### Input Configuration

Depending on the optional boards installed, the settings for the type and location of the input signals can be made from the Input Configuration menu.

```
INPUT CONFIGURATION
CH01
FORMAT...      YBPBR
SLOT NO       SLOT6
INPUT NO      1
YC SEP        ---
SYNC MODE     INT
SCREEN MODE   16:9-NORM
SAFE AREA DISPLAY OFF
MODE...
APERTURE      OFF
VALUE        100
```

### Matrix Interchangeability

Depending on the input signal, one of three matrices (ITU 601, ITU 709, or SMPTE 240M) can be chosen from the Matrix menu.

```
MATRIX
1080/60I      ITU 709
1080/50I      ITU 709
1080/48I      ITU 709
1035/60I      SMPTE 240M
720/60P       ITU 709
575/50P       ITU 601
575/50I       ITU 601
480/60P       ITU 601
480/60I       ITU 601
```

### Beam Landing Correction (BVM-D32E1WU/D24E1WU)

The BVM-D32E1WU and BVM-D24E1WU are capable of correcting beam landing shift which may occur as a result of the terrestrial magnetic field. This correction can be made manually or automatically, with the use of the optional BKM-14L Auto Set-up Probe.

```
MANUAL
DIRECTION     EAST
FINE ADJUST
NS            100
TOP LEFT     100
TOP RIGHT    100
BOTTOM LEFT  100
BOTTOM RIGHT 100
RESET
```

### Digital Uniformity (BVM-D32E1WU/D24E1WU)

White can be reproduced uniformly on every point of the screen, even in the peripheral area, through the digital uniformity circuit. This adjustment can be made manually or automatically, with the use of the optional BKM-14L Auto Set-up Probe.

```
WHITE UNIFORMITY (2/2)
1080/60I 16:9-UNDR
DIGITAL UNIFORMITY ADJ
MANUAL . . .
AUTO FULL POINTS . . .
ONE POINT . . .
ORIGINAL VALUE
1080/60I 16:9-NORM
SIGNAL EXT
```

### Digital Convergence (BVM-D32E1WU only)

The BVM-D32E1WU is capable of adjusting the convergence at each point of the screen, even in the peripheral area, through the digital convergence circuit. Using the on-screen menu, adjustments can be made to meet any installation.

```
CONV FINE ADJUST
1080/60I 16:9-NORM
ADJUST...
H CONV :CONTRAST KNOB
H G CONV :BRIGHT KNOB
V CONV :CHROMA KNOB
V G CONV :PHASE KNOB
CURSOR POSITION :10KEY
TO CANCEL :MENU KEY
TO CONFIRM :ENTER KEY
```

## Decoder and Expansion Boards for 32", 24" and 20" Monitors

The BVM-D32E1WU, BVM-D24E1WU and BVM-D20F1U are equipped as standard with Analog Component (Y/Pb/Pr, GBR) input/output connectors and four option slots in the rear panel of the monitor. Depending on the particular system requirements, the most appropriate boards can simply be inserted in the option slots in the rear panel of the monitor. A range of input decoder and expansion boards is available to provide many different input configurations. Although each decoder board has a primary function, when two or more boards are installed at the same time, they combine to accept a much wider range of signal inputs and standards.



BVM-D24E1WU with optional decoder and expansion boards

## Separate Control and Display Units

The 32", 24" and 20" monitors are designed as display units. However, an optional BKM-10R Control Unit can be easily attached to the 24" and 20" monitors with optional attachment kits.



BVM-D20F1U with optional BKM-10R and BKM-32H attached

## Input Decoder and Expansion Board Configurations

Signal format	Adaptor name	BKM-41HD HD SDI Input Adaptor	BKM-42HD HD SDI Input Adaptor	BKM-48X* HD Analog Input Expansion Adaptor	BKM-20D SDI 4:2:2 Decoder Adaptor	BKM-21D SDI Multi Decoder Adaptor	BKM-22X SDI Input Expansion Adaptor	BKM-24N NTSC Decoder Adaptor	BKM-25P PAL Decoder Adaptor	BKM-26M PAL-M Decoder Adaptor	BKM-27T Tri-Standard Decoder Adaptor	BKM-28X Analog Input Expansion Adaptor
Serial digital input	Component 525/625	-	-	-	⊙	⊙	○	-	-	-	-	-
	Composite NTSC	-	-	-	○	⊙	○	-	-	-	-	-
	Composite PAL	-	-	-	○	⊙	○	-	-	-	-	-
	575/50P	-	-	-	-	-	-	-	-	-	-	-
	480/60P	-	-	-	-	-	-	-	-	-	-	-
	1080/24PsF	⊙	⊙	-	-	-	-	-	-	-	-	-
	1080/50I	⊙	⊙	-	-	-	-	-	-	-	-	-
	1035/60I	⊙	⊙	-	-	-	-	-	-	-	-	-
1080/60I	⊙	⊙	-	-	-	-	-	-	-	-	-	
720/60P	⊙	⊙	-	-	-	-	-	-	-	-	-	
Analog input	Composite NTSC	-	-	○	○	⊙	○	⊙	○	○	⊙	○
	Composite PAL	-	-	○	○	⊙	○	○	⊙	○	⊙	○
	Composite PAL-M	-	-	○	○	○	○	○	○	⊙	○	○
	Composite SECAM	-	-	○	○	○	○	○	○	○	○	○
	Y/Pb/Pr 525/625	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
	GBR 525/625	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙
	Y/C NTSC	-	-	○	-	-	-	⊙	○	○	⊙	○
	Y/C PAL	-	-	○	-	-	-	○	⊙	○	⊙	○
	Y/C PAL-M	-	-	○	-	-	-	○	○	⊙	○	○
	Y/Pb/Pr, GBR 575/50P	⊙	⊙	⊙	-	-	-	-	-	-	-	-
	Y/Pb/Pr, GBR 480/60P	⊙	⊙	⊙	-	-	-	-	-	-	-	-
	Y/Pb/Pr, GBR 1080/24PsF	⊙	⊙	⊙	-	-	-	-	-	-	-	-
	Y/Pb/Pr, GBR 1080/50I	⊙	⊙	⊙	-	-	-	-	-	-	-	-
	Y/Pb/Pr, GBR 1035/60I	⊙	⊙	⊙	-	-	-	-	-	-	-	-
	Y/Pb/Pr, GBR 1080/60I	⊙	⊙	⊙	-	-	-	-	-	-	-	-
	Y/Pb/Pr, GBR 720/60P	⊙	⊙	⊙	-	-	-	-	-	-	-	-
Number of digital inputs		1	2	-	3	3	3	-	-	-	-	-
Number of analog inputs		1	1	6	3	3	3	6	6	6	6	6

\* Equipped with floating/non-floating ground mode selector for hum reduction.


⊙ Signal can be reproduced with this adaptor

○ Signal can be reproduced when combined with an appropriate decoder

# Features

## 14" and 9" Monitor Features

- 4:3 area marker
- Conventional functions, H/V delay, Underscan, Blue only, Mono are available
- Equipped with three color Tally (Red, Green, Amber: R + G)
- Mountable into a 19-inch EIA standard rack with optional mounting brackets
- Copy function enables INPUT CONFIG and SYSTEM CONFIG settings to be copied from other BVM-D14H/D9H monitors connected by serial remote
- Simplified menus for greater ease of use

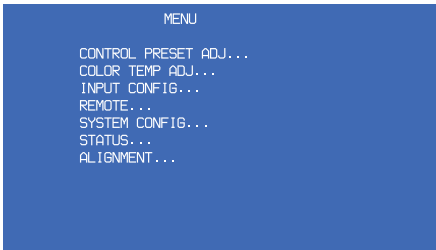

- Audio capability and built-in speaker in the bottom of the monitor (BVM-D9H5U only)
- Equipped with simple stand (BVM-D9H5U only)
- Operate on three alternative power sources: AC power (supplied adaptor), external DC 12 V, optional Lithium-ion batteries BP-L60A/L90A (BVM-D9H1U/D9H5U only)



BVM-D9H5U with AC adaptor (left) and optional BP-L60A battery pack (right)

The chart below shows the operation times of the 9" monitors when run on batteries. Times may vary depending on the picture, condition of the battery and temperature.

	Battery	Inserted Input Adaptor	
		Analog Component BKM-129X	Full options (max) BKM-142HD + BKM-120D
BVM-D9H1U/ BVM-D9H5U	BP-L60A	Approx. 90 min.	Approx. 60 min.
	BP-L90A	Approx. 150 min.	Approx. 100 min.

## Input Boards for 14" and 9" Monitors

A new series of four input boards has been developed specifically for the 14" and 9" BVM-D series monitors. With three option slots, these monitors are able to accept a wide variety of input signals.



BVM-D14H1U with optional input boards

### HD SDI Input Adaptor

#### ◆ BKM-142HD

- 2 HD SDI signal inputs/1 monitor out
- Acceptable HD SDI signals: 1080/24PsF, 1080/50I, 1035/60I, 1080/60I, 720/60P
- Power consumption: 9 W
- Dimensions: 49.7 (W) x 161.4 (H) x 121.8 (D) mm (6 3/8 x 4 7/8 inches)
- Mass: Approx. 730 g (1 lb 10 oz)
- \* This board occupies 2 slots



### SDI 4:2:2 Input Adaptor

#### ◆ BKM-120D

- 2 D1 SDI signal inputs/2 active outputs with loop-through
- Power consumption: 4 W
- Dimensions: 24.7 (W) x 161.4 (H) x 121.8 (D) mm (1 x 6 3/8 x 4 7/8 inches)
- Mass: Approx. 310 g (11 oz)



### NTSC/PAL Input Adaptor

#### ◆ BKM-127W

- 2 Analog composite with loop-through BNC, Automatic 75 Ω termination/1 Y/C with loop-through Mini DIN 4-pin, Automatic 75 Ω termination
- Power consumption: 3 W
- Digital 3-lines Comb filter
- Dimensions: 24.7 (W) x 161.4 (H) x 121.8 (D) mm (1 x 6 3/8 x 4 7/8 inches)
- Mass: Approx. 270 g (10 oz)



### Analog Component Input Adaptor

#### ◆ BKM-129X

(supplied as standard with 14" and 9" monitors)

- 1 Analog component (Y/Pb/Pr, GBR) with loop-through BNC, Automatic 75 Ω termination/1 EXT SYNC with loop-through BNC, Automatic 75 Ω termination
- Power consumption: 0.5 W
- Dimensions: 24.7 (W) x 161.4 (H) x 121.8 (D) mm (1 x 6 3/8 x 4 7/8 inches)
- Mass: Approx. 250 g (9 oz)





# Optional Accessories



Central Control Unit  
**BKM-10R**



Hand-held Control Unit  
**BKM-11R**




Memory Card  
**BKM-12Y**




Auto Set-up Probe  
**BKM-14L**



19" EIA Standard Rack Mount Kit  
for 20" monitors  
**BKM-30E20**



19" EIA Standard Rack Mount Kit  
for 14" monitors  
**BKM-31E14**




19" EIA Standard Rack Mount Kit  
for 14" stand-alone monitors  
**BKM-30E14**




Control Unit Attachment Kit  
for BKM-10R with 20" monitor  
**BKM-32H**




Control Unit Attachment Kit  
for BKM-10R with 24" monitor  
**BKM-34H**




Mounting Panel for EIA Standard Rack (5U)  
for 9" stand-alone monitors  
**MB-509**



19" Rack Mount Kit  
for BKM-10R  
**MB-510**

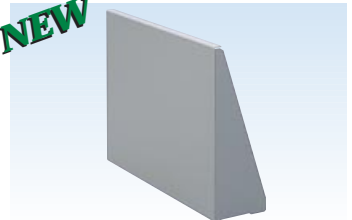

Mounting Panel for EIA Standard Rack (4U)  
for 9" display unit monitors  
**MB-519**



19" Rack Mount Kit  
for 9" monitors  
**MB-520**



Monitor ENG Kit (Hood and Rear  
Protector) for 9" monitors  
**VF-508**



9-pin Cable  
for RS-485/422 serial remote control  
**RCC-5G/10G/30G**



Rechargeable Lithium-ion Battery Packs  
for 9" monitors  
**BP-L60A/L90A**

# Specifications

		BVM-D32E1WU	BVM-D24E1WU	
<b>General</b>	Signal format	15.625 kHz to 45 kHz (For more details, please refer to the Acceptable Formats table)		
	Type	Display unit		
	Power requirements	100 to 240 V AC $\pm$ 10%, 50/60 Hz		
	Power consumption (with options)	180 W (235 W max.)	155 W (205 W max.)	
	Dimensions	mm	794 (W) $\times$ 556.5 (H) $\times$ 694 (D)	565.5 (W) $\times$ 436.8 (H) $\times$ 587.3 (D)
		inches (including all protruding parts)	31 $\frac{3}{8}$ $\times$ 22 $\times$ 27 $\frac{3}{8}$	22 $\frac{3}{8}$ $\times$ 17 $\frac{1}{4}$ $\times$ 23 $\frac{1}{8}$
	Mass	approx. 94 kg (206 lb 13 oz)		
	CRT	CRT type	32-inch HR Trinitron (flat surface, 16:9 aspect)	24-inch HR Trinitron (flat surface, 16:9 aspect)
		AG pitch	0.32–0.36 mm, 90° deflection, $\varnothing$ 29.1 mm in-line gun	
		Visual screen (viewable area, measured diagonally)	mm 4:3	491.3 (W) $\times$ 368.5 (H), (614.1)
16:9			655.2 (W) $\times$ 368.5 (H), (751.7)	482.1 (W) $\times$ 271.2 (H), (553.1)
inches 4:3		19 $\frac{3}{8}$ $\times$ 14 $\frac{5}{8}$ , (24 $\frac{1}{4}$ )	14 $\frac{1}{4}$ $\times$ 10 $\frac{3}{4}$ , (17 $\frac{7}{8}$ )	
inches 16:9	25 $\frac{7}{8}$ $\times$ 14 $\frac{5}{8}$ , (29 $\frac{5}{8}$ )	19 $\times$ 10 $\frac{3}{4}$ , (21 $\frac{7}{8}$ )		
Phosphor	SMPTE-C			
<b>Inputs/Outputs</b>	Video	BNC $\times$ 3, with loop-through		
	GBR	1.0 Vp-p $\pm$ 6 dB, positive		
	Y	1.0 Vp-p $\pm$ 6 dB, high impedance		
	PB/PR	0.7 Vp-p $\pm$ 6 dB, high impedance		
	Ext sync	BNC $\times$ 1, with loop-through		
	Composite	0.3 to 8.0 Vp-p, high impedance, tri-level bipolar sync		
	Remote	OPTION	RS-232C for BKM-11R	Mini DIN 8-pin
		CONTROL UNIT	RS-422 for BKM-10R	D-sub 9-pin
	REMOTE 1/Serial remote	RS-485 serial interface, D-sub 9-pin, with loop-through		
	REMOTE 2/Parallel remote 1	D-sub 9-pin $\times$ 1 (Short to ground)		
Parallel remote 2	Not Applicable			
ISR	D-sub 9-pin $\times$ 1			
<b>Video signal performance</b>	Differential gain (DG)	Within 5% for luminance from 0 to 70 cd/m <sup>2</sup>	Within 5% for luminance from 0 to 100 cd/m <sup>2</sup>	
	Differential phase (DP)	Within 5° for luminance from 0 to 70 cd/m <sup>2</sup>	Within 5° for luminance from 0 to 100 cd/m <sup>2</sup>	
	Frequency response	50 Hz to 30 MHz +1 dB/-3 dB		
	DC restoration	Back porch type, back porch level: within 1% of peak luminance, 10 to 90% APL		
<b>Synchronization</b>	Retrace time			
	Horizontal	under 3.77 $\mu$ sec		
Vertical	under 650 $\mu$ sec			
<b>Raster and picture performance</b>	Normal scan	5% over scan of the effective picture area		
	Under scan	3% under scan of the effective picture area		
	Linearity	Less than 1.0% within circle centered on the screen with a diameter equal to the vertical height, 2.0% at any other point*	Less than 0.5% within circle centered on the screen with a diameter equal to the vertical height, 1.0% at any other point*	
	Color temperature	D65/D93/COL 1/COL 2 (User adjustable)		
	Convergence	Less than 0.5 mm within circle centered on the screen with a diameter equal to the vertical height, 0.8 mm at any other point	Less than 0.4 mm within circle centered on the screen with a diameter equal to the vertical height, 0.7 mm at any other point	
	Preset brightness	70 cd/m <sup>2</sup> (30 fL) (when a 1.0 Vp-p 100% white signal is input)	100 cd/m <sup>2</sup> (30 fL) (when a 1.0 Vp-p 100% white signal is input)	
	Stability of raster size	1.0% of picture height (at 70 cd/m <sup>2</sup> peak luminescence, 10 to 90% APL)	1.0% of picture height (at 100 cd/m <sup>2</sup> peak luminescence, 10 to 90% APL)	
	Scan delay	Horizontal	Approx. $\frac{3}{8}$ line	
		Vertical	Approx. $\frac{1}{2}$ field	
	Center resolution	16:9 1000 TV lines, 4:3 1000 TV lines		
<b>Operating conditions</b>	Operating temperature	0 to 35°C (32 to 95°F) Optimum operating range 20 to 30°C (68 to 86°F)		
	Storage temperature	-10 to 40°C (14 to 104°F)		
	Humidity	0 to 90% (no condensation)		
<b>Others</b>	Supplied accessories	AC cable, AC plug holder, Tally label, Fuse, Operation manual		
	Regulation compliance	UL 1950/CSA 950 (cUL listed), FCC Class-A/IC Class-A, DHHS/DNHW		
<b>Dimensions (mm)</b>	<p>The drawings show the front and rear views of the BVM-D32E1WU and BVM-D24E1WU monitors. The BVM-D32E1WU dimensions are: Front view width 794 (31 3/8), height 556.5 (22); Rear view width 694 (27 3/8), height 556.5 (22). The BVM-D24E1WU dimensions are: Front view width 565.5 (22 3/8), height 436.8 (17 1/4); Rear view width 587.3 (23 1/8), height 436.8 (17 1/4).</p>			

\* 1080/60I and 1035/60I only.

BVM-D20F1U	BVM-D14H1U	BVM-D14H5U
15.625 kHz to 45 kHz (For more details, please refer to the Acceptable Formats table)		
Display unit		Stand-alone monitor
100 to 240 V AC $\pm$ 10%, 50/60 Hz		
150 W (210 W max.)	100 W (115 W max.)	
444 (W) $\times$ 414 (H) $\times$ 570 (D)	346 (W) $\times$ 280 (H) $\times$ 519 (D)	482 (W) $\times$ 280 (H) $\times$ 562 (D)
17 1/2 $\times$ 16 3/8 $\times$ 22 1/2	13 5/8 $\times$ 11 1/8 $\times$ 20 1/2	19 $\times$ 11 1/8 $\times$ 22 1/4
approx. 38 kg (83 lb 10 oz)	approx. 21 kg (46 lb 3 oz)	approx. 23 kg (50 lb 10 oz)
20-inch HR Trinitron		14-inch HR Trinitron
0.30 mm, 90° deflection, $\varnothing$ 30.6 mm in-line gun		0.25 mm, 90° deflection, $\varnothing$ 29.4 mm in-line gun
386 (W) $\times$ 291 (H), (482)	267.5 (W) $\times$ 200.6 (H), (331.6)	
386 (W) $\times$ 218 (H), (443)	267.5 (W) $\times$ 150.5 (H), (306.9)	
15 1/4 $\times$ 11 1/2, (19)	10 5/8 $\times$ 8, (13 1/8)	
15 1/4 $\times$ 8 5/8, (17 1/2)	10 5/8 $\times$ 6, (12 1/8) SMPTE-C	
SMPTE-C		
BNC $\times$ 3, with loop-through		BNC $\times$ 3, with loop-through, 75 $\Omega$ auto terminated
1.0 Vp-p $\pm$ 6 dB, positive		
1.0 Vp-p $\pm$ 6 dB, high impedance		
0.7 Vp-p $\pm$ 6 dB, high impedance		
BNC $\times$ 1, with loop-through		BNC $\times$ 1, with loop-through, 75 $\Omega$ auto terminated
0.3 to 8.0 Vp-p, high impedance, tri-level bipolar sync		
RS-232C for BKM-11R Mini DIN 8-pin		
RS-422 for BKM-10R D-sub 9-pin		Not Applicable
RS-485 serial interface, D-sub 9-pin, with loop-through		
D-sub 9-pin $\times$ 1 (Short to ground)		
Not Applicable		Modular connector 6-pin
D-sub 9-pin $\times$ 1		Not Applicable
Within 5% for luminance from 0 to 100 cd/m <sup>2</sup>		
Within 5° for luminance from 0 to 100 cd/m <sup>2</sup>		
50 Hz to 30 MHz +1 dB/-3 dB		48 Hz to 24 MHz +0 dB/-3 dB
Back porch type, back porch level: within 1% of peak luminance, 10 to 90% APL		
under 3.77 $\mu$ sec		
under 650 $\mu$ sec		
5% over scan of the effective picture area		
3% under scan of the effective picture area		
Less than 0.5% within circle centered on the screen with a diameter equal to the vertical height, 1.0% at any other point*		Less than 1.0% within circle centered on the screen with a diameter equal to the vertical height, 2.0% at any other point
D65/D93/COL 1/COL 2 (User adjustable)		
Less than 0.4 mm within circle centered on the screen with a diameter equal to the vertical height, 0.7 mm at any other point		
100 cd/m <sup>2</sup> (30 fL) (when a 1.0 Vp-p 100% white signal is input)	120 cd/m <sup>2</sup> (35 fL) (when a 1.0 Vp-p 100% white signal is input)	
1.0% of picture height (at 100 cd/m <sup>2</sup> peak luminescence, 10 to 90% APL)	1.0% of picture height (at 120 cd/m <sup>2</sup> peak luminescence, 10 to 90% APL)	
Approx. 3/8 line	Approx. 1/4 line	
Approx. 1/2 field		
16:9 700 TV lines, 4:3 900 TV lines		16:9 600 TV lines, 4:3 800 TV lines
0 to 35°C (32 to 95°F)		
Optimum operating range 20 to 30°C (68 to 86°F)		
-10 to 40°C (14 to 104°F)		
0 to 90% (no condensation)		
4:3 mask AC cable, AC plug holder, Tally label, Fuse, Operation manual		
UL 1950/CSA 950 (cUL listed), FCC Class-A/IC Class-A, DHHS/DNHW		

# Specifications

		BVM-D9H1U	BVM-D9H5U	
<b>General</b>	Signal format	15.625 kHz to 45 kHz (For more details, please refer to the Acceptable Formats table)		
	Type	Display unit	Stand-alone monitor	
	Power requirements	100 to 240 V AC $\pm$ 10%, 50/60 Hz		
	Power consumption (with options)	60 W (with OPTION: 85 W max.)		
	Dimensions (including all protruding parts)	mm	217 (W) $\times$ 174 (H) $\times$ 364.5 (438) <sup>*1</sup> (D)	218 (W) $\times$ 217 (H) $\times$ 379.5 (453) <sup>*1</sup> (D)
		inches	8 5/8 $\times$ 6 7/8 $\times$ 14 3/8 (17 1/4)	8 5/8 $\times$ 8 5/8 $\times$ 15 (17 7/8)
	Mass	approx. 8.1 kg (17 lb 13 oz), 8.9 kg (19 lb 9 oz) <sup>*2</sup>		
	CRT	CRT type	9-inch HR Trinitron	
		AG pitch	0.25 mm, 70° deflection, $\varnothing$ 21.6 mm in-line gun	
		Visual screen (viewable area, measured diagonally)	mm	155.4 (W) $\times$ 115 (H), (190.7)
inches			6 1/8 $\times$ 4 5/8, (7 5/8)	6 1/8 $\times$ 3 1/2, (7 1/8)
Phosphor		P-22		
<b>Inputs/Outputs</b>	Video	BNC $\times$ 3, with loop-through, 75 $\Omega$ auto terminated		
		GBR	1.0 Vp-p $\pm$ 6 dB, positive	
		Y	1.0 Vp-p $\pm$ 6 dB, high impedance	
		PB/PR	0.7 Vp-p $\pm$ 6 dB, high impedance	
	Ext sync	BNC $\times$ 1, with loop-through, 75 $\Omega$ auto terminated		
		Composite	0.3 to 8.0 Vp-p, high impedance, tri-level bipolar sync	
	Remote	OPTION	RS-232C for BKM-11R Mini DIN 8-pin	
		CONTROL UNIT	D-sub 9-pin (RS-485/422 switchable)	Not Applicable
		REMOTE 1/Serial remote	RS-485 serial interface, D-sub 9-pin, with loop-through	
		REMOTE 2/Parallel remote 1	D-sub 9-pin $\times$ 1 (Short to ground)	
Parallel remote 2		Modular connector 6-pin		
ISR	Not Applicable			
<b>Video signal performance</b>	Differential gain (DG)	Within 5% for luminance from 0 to 100 cd/m <sup>2</sup>		
	Differential phase (DP)	Within 5° for luminance from 0 to 100 cd/m <sup>2</sup>		
	Frequency response	48 Hz to 17 MHz +0 dB/-3 dB		
	DC restoration	Back porch type, back porch level: within 1% of peak luminance, 10 to 90% APL		
<b>Synchronization</b>	Retrace time	under 3.77 $\mu$ sec		
	Horizontal Vertical	under 650 $\mu$ sec		
<b>Raster and picture performance</b>	Normal scan	5% over scan of the effective picture area		
	Under scan	3% under scan of the effective picture area		
	Linearity	Less than 2.0% within circle centered on the screen with a diameter equal to the vertical height		
	Color temperature	D65/D93/COL 1/COL 2 (User adjustable)		
	Convergence	Less than 0.4 mm within circle centered on the screen with a diameter equal to the vertical height, 0.7 mm at any other point		
	Preset brightness	120 cd/m <sup>2</sup> (35 fL) (when a 1.0 Vp-p 100% white signal is input)		
	Stability of raster size	1.0% of picture height (at 120 cd/m <sup>2</sup> peak luminescence, 10 to 90% APL)		
	Scan delay	Horizontal Vertical	Approx. 1/4 line Approx. 1/2 field	
<b>Operating conditions</b>	Operating temperature	16:9 340 TV lines, 4:3 450 TV lines		
		0 to 35°C (32 to 95°F) Optimum operating range 20 to 30°C (68 to 86°F)		
	Storage temperature	-40 to 40°C (14 to 104°F)		
	Humidity	0 to 90% (no condensation)		
<b>Others</b>	Supplied accessories	4:3 mask, AC cable, AC plug holder, AC adaptor, Tally label, Operation manual		
	Regulation compliance	UL 1950/CSA 950 (cUL listed), FCC Class-A/IC Class-A, DHHS/DNHW		
<b>Dimensions (mm)</b>				

\*1 Depth with AC adaptor

\*2 Mass with AC adaptor

**Distributed by**

© 2000 Sony Corporation. All rights reserved.  
 Reproduction in whole or in part without written permission is prohibited.  
 Features and specifications are subject to change without notice.  
 All non-metric weights and measures are approximate.  
 Sony and Trinitron are registered trademarks of Sony Corporation.